

CODICE/CODE: **ZGL060016**

Batteria sigillata AGM
AGM maintenance free battery



Volt		6V
Capacity/capacità (20h)		5Ah
Capacity/capacità 25°C	10h	4.5Ah
	5h	4.25Ah
	1h	3.3Ah
Internal Resistance	Full Charged Battery 25°C	≤18mΩ
Capacity affected by Temperature	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge 25°C Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C	Float	Volt 6.8-6.9V
	Charge	Max.1.5Amp. 7.2-7.5Volt




Battery Dimensions/ Dimensioni batteria	L/L	70mm
	W/P	47mm
	H/A	101mm
	Tot- H/A	107mm
Box Dimensions/ Dimensioni scatola	L/L	274mm
	W/P	160mm
	H/A	147mm
Weight/peso		0.75Kg
Terminal/terminal		F1
Case/contenitore		ABS

Amp. (25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	16.50	11.00	8.28	5.50	3.85	3.30	2.06	1.41	0.94	0.63	0.52	0.28
1.65V	16.20	10.80	8.13	5.40	3.78	3.24	2.03	1.39	0.93	0.62	0.51	0.27
1.70V	15.90	10.60	7.98	5.30	3.71	3.18	1.99	1.36	0.91	0.61	0.50	0.27
1.75V	15.60	10.40	7.83	5.20	3.64	3.12	1.95	1.34	0.89	0.60	0.49	0.26
1.80V	15.00	10.00	7.52	5.00	3.50	3.00	1.88	1.28	0.86	0.58	0.48	0.25

Watts (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	31.76	21.18	15.93	10.59	7.41	6.35	3.97	2.72	1.81	1.22	1.01	0.53
1.65V	31.19	20.79	15.64	10.40	7.28	6.24	3.90	2.67	1.78	1.20	0.99	0.52
1.70V	30.61	20.41	15.35	10.20	7.14	6.12	3.83	2.62	1.75	1.18	0.97	0.51
1.75V	30.03	20.02	15.06	10.01	7.01	6.01	3.75	2.57	1.72	1.15	0.95	0.50
1.80V	28.88	19.25	14.48	9.63	6.74	5.78	3.61	2.47	1.65	1.11	0.92	0.48

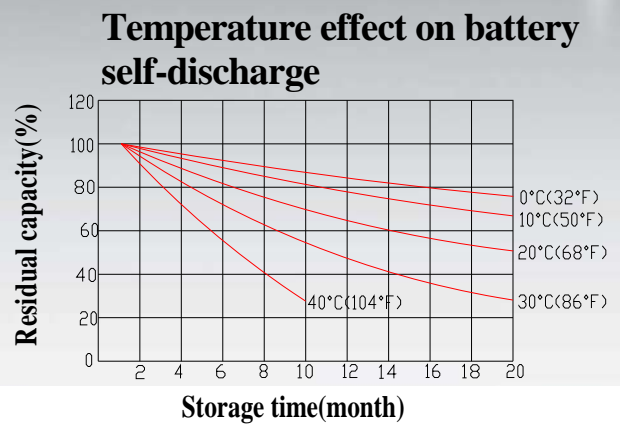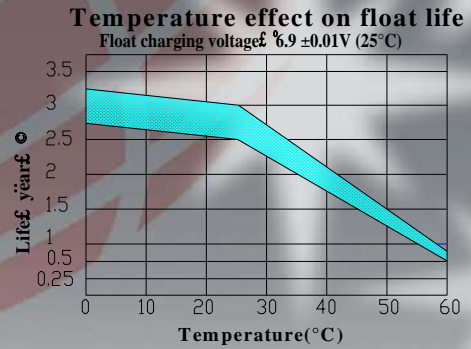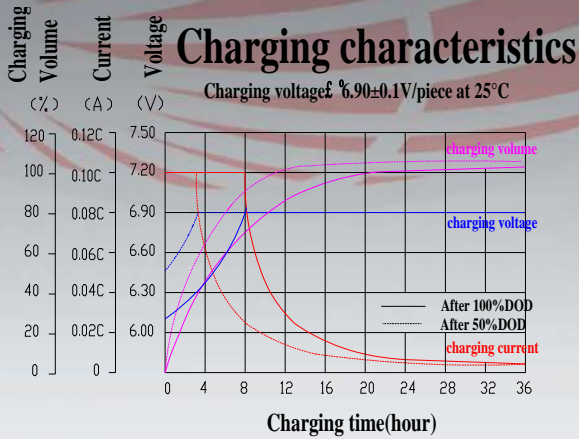

Discharge characteristics (25°C)

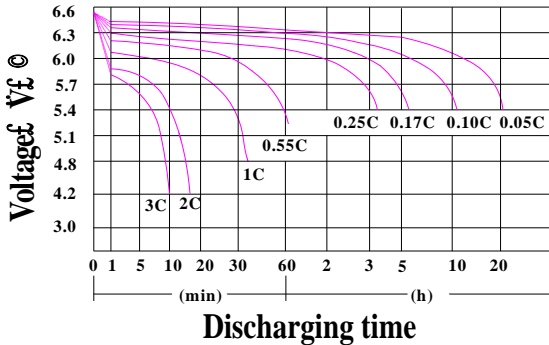

Temperature effect on capacity

