

CODICE/CODE: **ZGL060026**

Batteria sigillata AGM
AGM maintenance free battery



Volt		6V
Capacity/capacità (20h)		12Ah
Capacity/capacità 25°C	10h	11.5Ah
	5h	10.20Ah
	1h	7.8Ah
Internal Resistance	Full Charged Battery 25°C	≤10mΩ
Capacity affected by Temperature	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge 25°C Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C	Float	Volt 6.8-6.9V
	Charge	Max.4.8Amp. 7.2-7.5Volt



Battery Dimensions/ Dimensioni batteria	L/L	151mm
	W/P	50mm
	H/A	93mm
	Tot- H/A	98mm
Box Dimensions/ Dimensioni scatola	L/L	
	W/P	
	H/A	
Weight/peso		1.86Kg
Terminal/terminal		F1
Case/contenitore		ABS

Amp. (25°C)



F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	50.0	34.0	25.0	13.5		7.80		3.31	2.19		1.20	0.64
1.65V	47.4	32.4	23.9	13.0		7.52		3.21	2.14		1.20	0.64
1.70V	44.7	30.7	22.8	12.4		7.22		3.10	2.08		1.18	0.62
1.75V	41.9	29.0	21.6	11.8		6.90		2.98	2.02		1.15	0.60
1.80V	39.1	27.2	20.4	11.2		6.57		2.85	1.95		1.12	0.58

Watts (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	88.0	59.2	47.7	26.8	21	15.6	9.78	6.60	4.37			
1.65V	82.5	55.7	45.1	25.9	20	15.1	9.49	6.42	4.26			
1.70V	77.1	52.3	42.5	24.5	19	14.4	9.17	6.22	4.10			
1.75V	71.7	48.8	39.8	23.1	18	13.8	8.81	6.00	3.96			
1.80V	66.4	45.4	37.2	21.9	17	13.4	8.43	5.76	3.82			

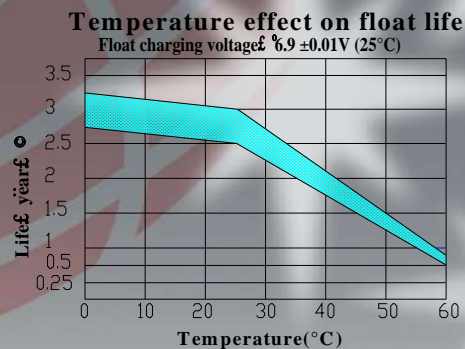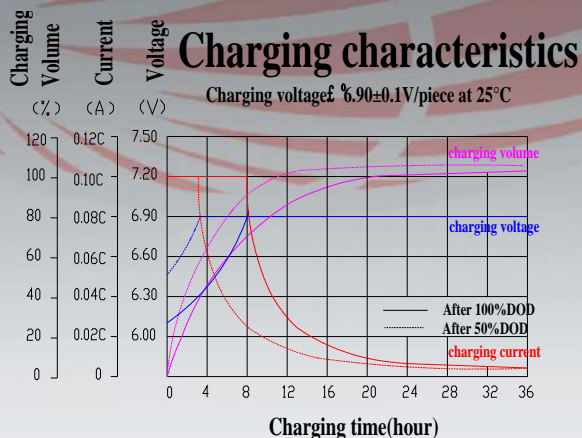

Discharge characteristics (25°C)

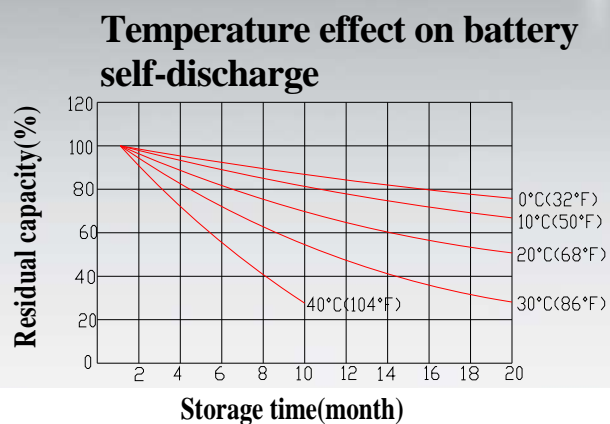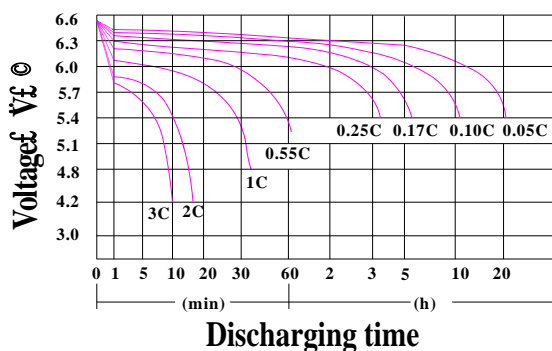

Temperature effect on capacity

