

CODICE/CODE: **ZLS120160**

Batteria sigillata AGM DEEP-CYCLE (uso ciclico) al silicone
Silicon DEEP-CYCLE AGM maintenance free battery






Volt		12V
Capacity/capacità 25°C	20h (10.5Volt)	60Ah
	10h (10.5Volt)	54Ah
	5h (10.5Volt)	30.6Ah
Internal Resistance	Full Charged Battery 25°C	≤7m Ω
Capacity affected by Temperature/Effetti della temperatura sulla capacità	40°C	102%
	25°C	100%
	0°C	85%
	-10°C	75%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge cycle/ Ciclo di carica	IU + h	"In" max. 12Amp; "V1" 2.43V/cell
	IUIa	"In" max. 12Amp; "V1" 14.4Volt; "If" 0.5Amp.

Battery Dimensions/ Dimensioni batteria	L/L	265mm
	W/P	166mm
	H/A	188mm
	Tot- H/A	188mm
Weight/peso		20.7Kg
Terminal/terminal		AP
Plt. Qt. / Qt. per pallet		48
Case/contenitore		ABS


Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.75V			87	55.9	41.3	34.1	18.1	13.6	9.52	6.53	5.4	3.0

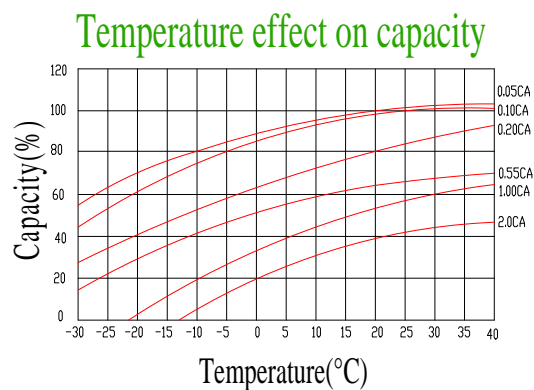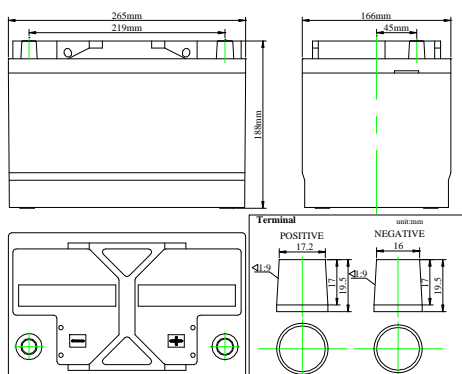

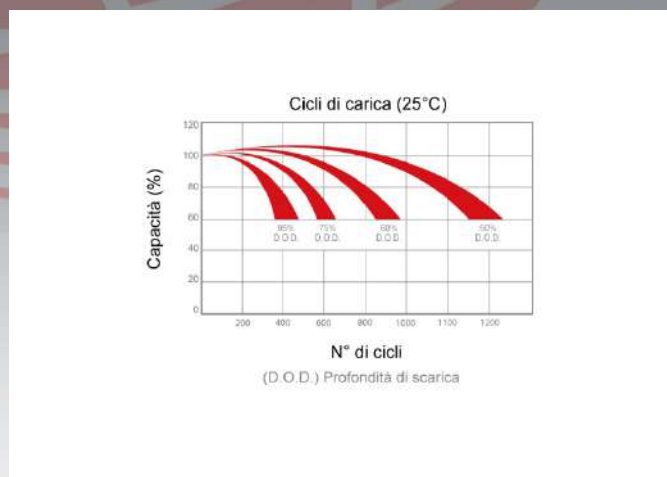

Charge cycle for sealed batteries (GEL/AGM): IU + holding

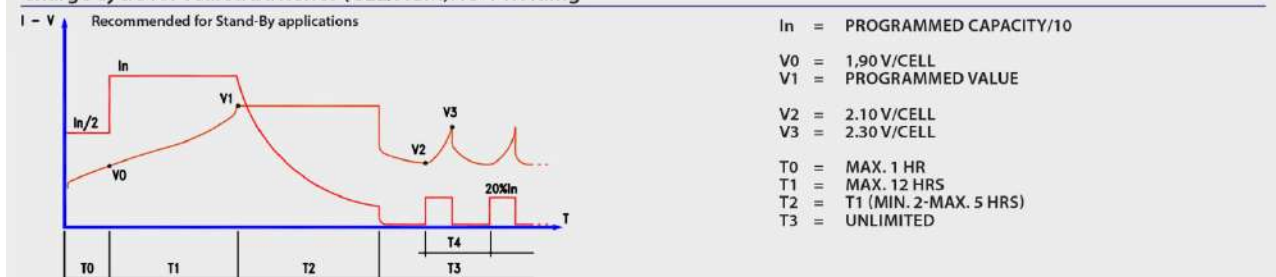

“IUla” charge cycle is always recommended in case of more than 2 batteries in series
 Ciclo di carica “IUla” è sempre necessario qualora ci siano più di 2 batterie collegate in serie

IUla charge cycle

